


High capacity, Very quick to assemble, Fast and efficient, Very reliable, CAT engine, New type of Cabin



## WOLTMAN 40 PR

Woltman is continuously improving their range of equipment. Developments in relation to emission standards and fuel efficiency might result in different specifications. No rights can be attached to the dimensions and specifications mentioned on this leaflet because they might have changed without further notification. All data is subject printing and conversion errors.

## **TECHNICAL SPECIFICATIONS**

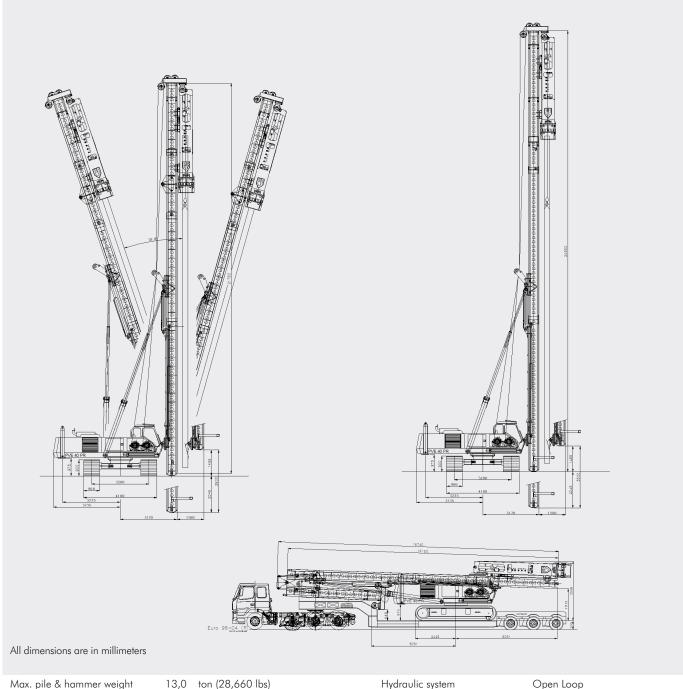

Max. pile & hammer weight	13,0	ton (28,660 lbs)		
Capacity hammer winch	8	ton (17,636lbs)		
Capacity pile winch	6	ton (13,228 lbs)		
Capacity optional aux. winch	3	ton (6,613lbs)		
Standard leader length	21,8	mtr		
Maximum leader length	24,8	mtr		
Diesel engine	Cater	Caterpillar C-7		
Output diesel engine	250 H	250 HP / 183 kW		
Emission regulation	TIER 3	TIER 3/4		

Tryataone system	Орон 200р			
Hydraulic pumps	Rexroth			
Hydraulic valve blocks	Rexroth			
Transport width	3.300	mm	(10,83 ft)	
Transport length	16.740	mm	(54,92 ft)	
Transport height	3.550	mm	(11,65 ft)	
Recommended hammer	PVE 4NL			
Weight base macchine	40	ton	(88,185 lbs)	

DIESEKO GROUP